



Mufflers & Precleaners

REVISED DATE (05/24)



PARTS CATALOGUE SECTION 13B



Westward has the part!

Westward has the part!

Westward has the part! That's our commitment to you, and that's what sets us apart. Westward Parts has over 50 years of expertise with all makes of agricultural parts, sprayer parts, sprayers, as well as ground maintenance and estate equipment. Our Canadian dealers are served from three different warehouse locations across the country. Westward Parts offers our dealers the most comprehensive product portfolio and exclusive product offerings. And it will all be delivered on time, with an enjoyable customer service experience that won't let you down.

Westward Parts Distribution:



RED DEER
6517 - 67 Street
Red Deer, AB T4P 1A3
Fax: 1-800-661-4508

REGINA
201 Henderson Drive
Regina, SK S4N 7E2
Fax: 1-800-721-2977

WINNIPEG
1435 St. James Street
Winnipeg, MB R3H 0W9
Fax: 1-800-257-8338

1-888-937-7278
WWW.WESTWARDPARTS.COM

Contents

HEAVY DUTY TRUCK MUFFLERS	17
Chevrolet Trucks ½ - 2 Ton	17
Ford Trucks ½ - 2 Ton	17
GMC Trucks ½ - 2 Ton	17
International Trucks ½ - 2 Ton	17
MUFFLERS	5
Allis-Chalmers Combines	5
Allis-Chalmers Tractors	5
Case Combines	7
Case Exhaust Pipe	7
Case Tractors	16-7
Cockshutt Tractors	8
David Brown Tractors	8
Ford New Holland Tractors	10-11
International Tractors	11-13
John Deere Combines	10
John Deere Muffler & Pipe Kit	10
John Deere Tractors	8-9
Massey Tractors	13-15
Minneapolis-Moline Tractors	15
Oliver Tractors	15
Versatile Tractors	15-16
White Tractors	16
Wisconsin Motors	16
Yanmar	17
MUFFLER ACCESSORIES	5
Clamps- Saddle Type	5
Clamp Kits	5
PRECLEANERS	1-4
Turbo II Precleaner	2
Power Ram	3

turbo® PRECLEANER

Over 40 years of American-made, unmatched engine protection.



WHY TURBO® PRECLEANERS?

Extends engine air filter life

Unique design prevents micro-abrasives from entering machine's engine.

Original "Top-Down" air flow design

turbo® precleaners have aerodynamically designed overlapped vanes that force the incoming air to spin, causing separation of dust and dirt from the air by centrifugal force. The debris then spins down the wall of the main chamber and into the blower chamber, where the high-velocity spinner forces the dirt to the discharge ports at the base of the unit, providing the cleanest possible air to the filter element.

Competitors typically use "REVERSE AXIAL" designs, in which air is drawn in through the base of the unit and must make a "U" turn, adding restriction and reducing the power of the engine. Additional restriction to the engine will cause the need for more frequent engine filter replacements.

Wide CFM range for every machine

turbo® precleaners are manufactured in a gamut of sizes and cover an expansive CFM range that suits most machines on the market today.

A full range of sizes offered

Each turbo® precleaner is offered in a range of different sizes to fit different engines.

Self-powered and self-cleaning

You have a job to worry about, you shouldn't need to bother with charging or maintaining parts. turbo® precleaners are self-cleaning and never need external power or charging.

Prolongs engine life

turbo® precleaners prolong the life of your engines by significantly reducing engine wear. It's the precleaner of choice for equipment operators in the dustiest, dirtiest, harshest environments.

Promotes maximum engine power

turbo® precleaners are critical to maintain effective, clean engine breathing for maximum efficiency and power.

Minimizes costly down time

turbo® precleaners protect your engine from particulate as small as one micron. Maximum protection means little-to-no down-time.

Easy installation, multiple mounting options

turbo® precleaners install or clamp on in mere minutes and require no complicated installation or extensive tools.

Heavy duty, backed by warranty

turbo® precleaners are warranted for 2 years and the internal spinner assemblies are warranted for life. It's the precleaner chosen by OEMs and equipment owners and operators worldwide for its efficiency and durability.

Relentlessly tested, made in the U.S.A.

turbo® precleaners are made in the United States and tested to industry SAE J726 and ISO 5011 standards.

Turbo II Precleaners

turbo® II performs its job in the toughest environments day in and day out. The unique design is all about preventing micro-abrasive dust from entering the machine's engine creating cleaner air to prolong the engine life. turbo® II is the industry standard precleaner by which all precleaners are judged.

From its durable metal construction to its high efficiency and low restriction across the entire range, turbo® II is chosen worldwide by equipment operators for installation on loaders, graders, crushers, haulers, mixers, and mining machines. Anywhere a high level of protection is needed and where dust is an issue, the turbo® II is a must.

THE BENEFITS OF TURBO AGRICULTURE PRECLEANERS:

- Extends Engine Air Filter Life
- Original "Top-Down" Air Flow Design
- Wide CFM Range For Every Machine
- A Full Range Of Sizes Offered*
- Self-Powered And Self-Cleaning
- Prolongs Engine Life
- Minimizes Costly Down Time
- Easy Installation, Multiple Mounting Options

*Available upon request




Part Number	Model	Inlet Size Base	Outside Diameter	Height	Airflow Range	Weight
MUF21-1024000	24	3" / 76mm	8" / 203 mm	11" / 279mm	100-250	5 lbs.
MUF21-1035000	35	4.5" / 114mm	9.25" / 235 mm	12.25" / 311 mm	250-350 / 7.1-9.9	6.5 lbs.
MUF21-1046000	46	4.5" / 114mm	12.25" / 311 mm	15.5" / 394 mm	350-700 / 8.5-19.8	11 lbs.
MUF21-1046001	46	5" / 127mm	12.25" / 311 mm	15.5" / 394 mm	350-700 / 8.5-19.8	11 lbs.
MUF21-1046002	46	6" / 152mm	12.25" / 311 mm	15.5" / 394 mm	350-700 / 8.5-19.8	11 lbs.
MUF21-1068001	68	6" / 152mm	14.5" / 368 mm	17.5" / 444 mm	700-1100 / 19.8-31.1	16 lbs.
MUF21-1068002	68	7" / 178mm	14.5" / 368 mm	17.5" / 444 mm	700-1100 / 19.8-31.1	16 lbs.
MUF21-1068003	68	8" / 203mm	14.5" / 368mm	17.5" / 444 mm	700-1100 / 19.8-31.1	16 lbs.



TURBO® II "TOP-DOWN" DESIGN

The turbo® II is the only metal precleaner that offers a "Top Down" air flow by drawing dirty air through the protective screen at the top of the unit. turbo® II Precleaners have aerodynamically designed overlapped vanes that force the incoming air to spin and causing separation of dust and dirt from the air by centrifugal force. The dust and debris then spins down the wall of the main chamber and into the blower chamber where the high velocity spinner forces the dirt to the discharge ports at the base of the unit. As the velocity of the primary air stream increases, it ejects out additional dirt and debris providing the cleanest possible air to the filter element. This design offers exceptional balance between added restriction and efficiency.

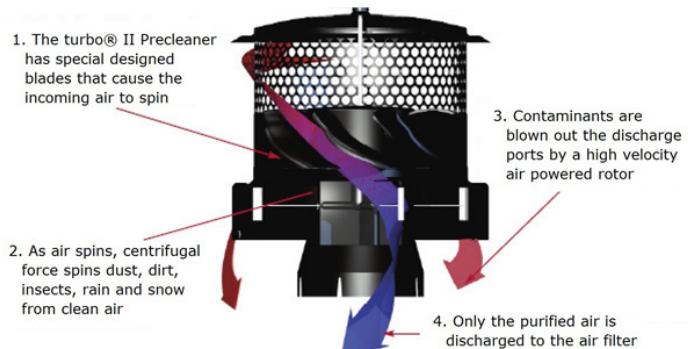

Power Ram

A rugged, heavy duty precleaner for a wide variety of applications where directional flow is desired. The Power Ram™ pre-cleaner covers the broadest flow range with excellent efficiency and low restriction. It's on a variety of machines including construction, mining and on-road applications, this precleaner utilizes RAM effect to achieve high pre-separation efficiency, extending the life of your primary air filter and saving you money and limiting down time. Some applications require Y-Pipe for Power Rams mounted side-by-side.

THE BENEFITS OF TURBO POWER RAM PRO:

- Improved engine performance, saves fuel
 - Extends engine air filter life
 - Built to last, backed by warranty
 - 3 sizes*, 500-1500 CFM
- *Available upon request
- Prolongs engine life
 - Minimizes costly down time
 - Critical for landscaping, forestry, & more
 - Heavy duty stainless steel band clamp



Part Number	Model	Inlet Size Base	Outside Diameter	Height	Airflow Range	Weight
MUF21-1080003	Power Ram	7" / 178mm	13.5" x 14.5" 342.9 mm x 368.3 mm	13.25" 336.55 mm	500-1500 / 14.2-42.5	9 lbs.



Sizing Calculator - turbo® Precleaners Recommendations for Heavy Equipment

Used in Agriculture, Construction, Mining, Logging, Municipal and Industrial Applications

In order to accurately determine the proper turbo® Precleaner to use with any specific make or model of a diesel or gasoline engine, you must first calculate the CFM (cubic feet per minute of air) requirement of that engine. In making this calculation, it is important to note that any change in the RPM (revolutions per minute) or the addition of a turbocharger can alter the CFM rating of the engine.

FORMULA

$$\text{Air (CFM)} = \frac{\text{RPM} \times \text{CID} \times \text{Vol. Eff.}}{3456}$$

To convert Metric Displacements to CID for use in the formula above, use the following conversion factor:

Displacement in Liters x 61.02 = CID

Volumetric Efficiency

Diesel Engines - normally aspirated = .85

Turbocharged = 1.85
(intercooled/aftercooled)

CFM - Cubic Feet per Minute | RPM - Revolutions per Minute | CID - Cubic Inch Displacement | Vol. Eff. - Volumetric Efficiency

SPECIFICATIONS		Inlet Size Base	Outside Diameter		Height	Weight				
Model Number	Product Description	CFM Range	Inches	mm	Inches	mm	Inches	mm	lbs	kg
turbo® II Precleaners										
21-1024000	Model 24 - 3"	100-250	3"	76	8"	203	11"	279	5	2.3
21-1024015	Model 24 - 4"	100-250	4"	102	8"	203	11"	279	5	2.3
21-1035000	Model 35	250-350	4.5"	114	9.25"	235	12.25"	311	6.5	2.9
21-1046000	Model 46 - 4 1/2"	350-700	4.5"	114	12.25"	311	15.5"	394	11	4.9
21-1046001	Model 46 - 5"	350-700	5"	127	12.25"	311	15.5"	394	11	4.9
21-1046002	Model 46 - 6"	350-700	6"	152	12.25"	311	15.5"	394	11	4.9
21-1046003	Model 46 - 7"	350-700	7"	179	12.25"	311	15.5"	394	11	4.9
21-1068001	Model 68 - 6"	700-1100	6"	152	14.5"	368	17.5"	444	16	7.3
21-1068002	Model 68 - 7"	700-1100	7"	179	14.5"	368	17.5"	444	16	7.3
21-1068003	Model 68 - 8"	700-1100	8"	203	14.5"	368	17.5"	444	16	7.3
turbo® II HD Precleaners										
21-1046006	Model 46 - 4 1/2"	350-700	4.5"	114	15"	381	16"	406.4	11	4.9
21-1046005	Model 46 - 5"	350-700	5"	127	15"	381	16"	406.4	11	4.9
21-1046004	Model 46 - 6"	350-700	6"	152	15"	381	16"	406.4	11	4.9
21-1046007	Model 46 - 7"	350-700	7"	179	15"	381	16"	406.4	11	4.9
21-1068005	Model 68 - 6"	700-1100	6"	152	17"	432	16.85"	428	16	7.3
21-1068006	Model 68 - 7"	700-1100	7"	179	17"	432	16.85"	428	16	7.3
21-1068007	Model 68 - 8"	700-1100	8"	203	17"	432	16.85"	428	16	7.3
turbo® II MAX Precleaners										
21-1068026	Model 68 - 6"	700-1100	6"	152	16"	406	15"	381	16.5	7.5
21-1068027	Model 68 - 7"	700-1100	7"	179	16"	406	15"	381	16.5	7.5
21-1068028	Model 68 - 8"	700-1100	8"	203	16"	406	15"	381	16.5	7.5
turbo® II Bullnose Precleaners										
FOR UNDER COVER AND HORIZONTAL MOUNT										
21-1024010	Model 24	100-250	3"	76	8"	203	7.8"	199	5	2.3
21-1035020	Model 35	250-350	4.5"	114	9.25"	235	7.9"	201	6	2.7
21-1046011	Model 46 - 4 1/2"	350-700	4.5"	114	12.25"	311	11.9"	303	10.5	4.8
21-1046009	Model 46 - 5"	350-700	5"	127	12.25"	311	11.9"	303	10.5	4.8
21-1046010	Model 46 - 6"	350-700	6"	152	12.25"	311	11.9"	303	10.5	4.8
21-1068015	Model 68 - 6"	700-1100	6"	152	14.5"	368	16.85	428	15.5	7
21-1068016	Model 68 - 7"	700-1100	7"	179	14.5"	368	16.85	428	15.5	7
21-1068017	Model 68 - 8"	700-1100	8"	203	14.5"	368	16.85	428	15.5	7
turbo® III Precleaners										
21-1320000	Model 15 - 2"	15-85	2"	51	5.27"	134	5.13"	279	0.5	0.23
21-1320001	Model 15 - 2" Bullnose	15-85	2"	51	5.27"	134	5.13"	279	0.5	0.23
21-1330000	Model 50 - 3"	50-250	3"	76	7.5"	191	8"	203.2	1.5	0.68
21-1330001	Model 50 - 4"	50-250	4"	102	7.5"	191	8"	203.2	1.5	0.68
21-1345000	Model 200 - 4.5"	200-500	4.5"	114	9.34"	237	11.6"	294.6	4.4	1.99
21-1350000	Model 200 - 5"	200-500	5"	127	9.34"	237	11.6"	294.6	4.4	1.99
21-1450000	Model 390 - 5"	300-700	5"	127	12.37"	323	11.5"	291.9	6	2.72
21-1460000	Model 390 - 6"	300-700	6"	152	12.37"	323	11.5"	291.9	6	2.72
21-1470000	Model 390 - 7"	300-700	7"	178	12.37"	323	11.5"	291.9	6	2.72
21-1360000	Model 500 - 6"	500-1100	6"	152	13.8"	350	14.1"	358	7.5	3.4
21-1370000	Model 500 - 7"	500-1100	7"	178	13.8"	350	14.1"	358	7.5	3.4
21-1380000	Model 500 - 8"	500-1100	8"	203	13.8"	350	14.1"	358	7.5	3.4
Flex-N-Line™ - Under Hood Precleaners										
21-1330002	Model 50 - 3"	75-225	3"	89	3	5	10.7"	272	3	1.36
21-1345002	Model 200 - 4.5"	200-475	4.5"	127	4.5"	8	12.9"	327	5.5	2.5
PowerRam™ Precleaners										
21-1080002	PowerRam™ 6"	500-1500	6"	152	3.5"X14.5	342.9x368.3	13.25"	336.6	9	4.1
21-1080003	PowerRam™ 7"	500-1500	7"	178	3.5"X14.5	342.9x368.3	13.25"	336.6	9	4.1
21-1080004	PowerRam™ 8"	500-1500	8"	203	3.5"X14.5	342.9x368.3	13.25"	336.6	9	4.1

turbo II® and PowerRam Precleaners - Metal

turbo III® and Flex-n-line Precleaners - Engineered Polymer

MUFFLERS

Allis-Chalmers Tractors

PART NO.	FOR MODELS	SPECS.
MUFAC1 Replaces 70210081 Inlet Clamp: MC112 Rain Cap: RC0	B, C, CA (exc. low octane engine) (1938-1957) - long muffler. (Vertical round body)	Weight: 5 lbs. Length: 29" Outlet O.D.: 1 1/2" Outlet Length: 9 1/4" Shell Length: 12 3/4" Inlet I.D.: 1 3/8" Inlet Length: 7" Shell Diameter: 3 1/4"
MUFAC2 Replaces 70219534 Inlet Clamp: MC158 Rain Cap: RC1	WD, (Gas) (1948-53) (Vertical round body)	Weight: 5 lbs. Length: 29" Outlet O.D.: 1 3/4" Outlet Length: 10 1/4" Shell Length: 16 1/2" Inlet I.D.: 1 5/8" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"
MUFAC3 Replaces 70233450 70227240 Inlet Clamp: n/a Rain Cap: RC0	B, C, CA (1938-1957)-thru hood. D10, D12, D14, D15 (Gas)-(to s/n 9001). Note: includes brackets, (1)-to head bolt, (1) to manifold. (Vertical round body)	Weight: 5 lbs. Length: 29" Outlet O.D.: 1 1/2" Outlet Length: 10" Shell Length: 16 1/2" Inlet I.D.: 1 3/8" Inlet Length: 2 1/2" Shell Diameter: 3 1/4"
MUFAC16 Replaces 70253660 Inlet Clamp: MC300 Rain Cap: RC4	190 XT, 200 (early), 210 & 220 (Diesel) (1964-1973). (Vertical round body)	Weight: 13 lbs. Length: 40" Outlet O.D.: 3" Outlet Length: 7" Shell Length: 28 1/2" Inlet I.D.: 3" Inlet Length: 4 1/2" Shell Diameter: 5"
MUFAC20 Replaces 70268785 70261975 Inlet Clamp: MC300 Rain Cap: RC4	7000 (s/n 8553 & UP), 7010, 7020, 7030, 7040, 7045, 7050 & 7060 (all diesel)-(1979-1981) (Vertical oval body)	Weight: 17 lbs. Length: 48" Outlet O.D.: 3" Outlet Length: 11 3/4" Shell Length: 32 1/4" Inlet I.D.: 3" Inlet Length: 4" Shell Diameter: 6" x 10"
MUFAC22 Replaces 70271755 Inlet Clamp: MC300 Rain Cap: RC4	200 (late), 7000 (to s/n 8553) (Diesel), 190 Diesel Turbo (Vertical round body)	Weight: 16 lbs. Length: 48" Outlet O.D.: 3" Outlet Length: 12" Shell Length: 32 1/2" Inlet I.D.: 3" Inlet Length: 3 1/2" Shell Diameter: 5 1/2"

Allis-Chalmers Combines

PART NO.	FOR MODELS	SPECS.
MUFAC101 Replaces 71118626 Inlet Clamp: MC200	T2 & T3 (vertical) (Vertical round body)	Weight: 4 lbs. Length: 12" Outlet O.D.: 2" Outlet Length: 2 1/4" Shell Length: 7 1/2" Inlet I.D.: 2" Inlet Length: 2 1/4" Shell Diameter: 6"
MUFAC105 Replaces 71131701 71130606 Inlet Clamp: MC200	C & C11 Prior to SN 10000 Model E (D17 Engine) (horizontal) (Horizontal round body)	Weight: 5 lbs. Length: 18" Outlet O.D.: 2 1/4" Outlet Length: 2" Shell Length: 16" Inlet I.D.: 2" Inlet Length: 2" Shell Diameter: 4 1/4"

MUFFLER ACCESSORIES

Clamp Kits



MUFJD300



MUFFO300

PART NO.	RE-PLACES OEM #	TRACTOR APPLICATION	WEIGHT
MUFJD300	R32235 AR46323	To fit John Deere Tractors 3020, 4010, 4020, 4000, 4030 & 4230 with flared inlet muffler.	1 lb.
MUFFO300	CAPN 5200A	To fit Ford tractors 9N, 2N, & 8N with flared inlet pipe.	1 lb.

Clamps- Saddle Type



PART NO.	I.D.	WEIGHT
MUFMC112	1 1/2"	1 lb.
MUFMC158	1 5/8"	1 lb.
MUFMC134	1 3/4"	1 lb.
MUFMC178	1 7/8"	1 lb.
MUFMC200	2"	1 lb.
MUFMC214	2 1/4"	1 lb.
MUFMC212	2 1/2"	1 lb.
MUFMC234	2 3/4"	1 lb.
MUFMC300	3"	1 lb.
MUFMC314	3 1/4"	1 lb.
MUFMC312	3 1/2"	1 lb.
MUFMC400	4"	1 lb.
MUFMC500	5"	2 lb.

Case Tractors

PART NO.	FOR MODELS	SPECS.
MUFCA1 Replaces A20494 Inlet Clamp: MC214 Rain Cap: RC5	C, CC, CL, D, DC, DE, DL, DIM, DS & "4" (to 1954) (all gas engine). 400 (gas & diesel) 1955-1957. 700 & 800 (gas & diesel) 1958-1959 (Vertical round body)	Weight: 6 lbs. Length: 26" Outlet O.D.: 2 1/4" Outlet Length: 6" Shell Length: 17" Inlet I.D.: 2 1/4" Inlet Length: 3" Shell Diameter: 4 1/4"
MUFCA2 Replaces VTA 2811 VTA 1135 Inlet Clamp: MC200 Rain Cap: RC2	V, VA, VAC & VC (Gas) (1953-1955). 200B, 300B, 400B, & 500B (1957-1959). 300, 400, 500, & 600 (1953-1957) 310 & 350 (1954-59) (Vertical round body).	Weight: 5 lbs. Length: 29" Outlet O.D.: 2" Outlet Length: 9 1/2" Shell Length: 16 3/4" Inlet I.D.: 1 15/16" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"
MUFCA3 Replaces 06417AB Inlet Clamp: MC214 Rain Cap: RC5	SC, SI & SO (Gas)-(to 1954) (Vertical round body)	Weight: 5 lbs. Length: 26" Outlet O.D.: 2 1/4" Outlet Length: 7" Shell Length: 16 1/2" Inlet I.D.: 2 3/16" Inlet Length: 2 1/2" Shell Diameter: 3 1/4"
MUFCA4 Replaces G13032 Inlet Clamp: MC158 Rain Cap: RC1	200B, 210B, 211B (Gas)-(1957-1959) 300 (53-57), 300B, 310B, 311B (57-59) 410B (57-59)-(Gas and Diesel). 430 (Gas) to s/n 8191147-(1960-1962). (Horizontal round body)	Weight: 4 lbs. Length: 22 1/2" Outlet O.D.: 1 3/4" Outlet Length: 3" Shell Length: 16 3/4" Inlet I.D.: 1 5/8" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"
MUFCA5 Replaces G45264 Inlet Clamp: MC212 Rain Cap: RC3	430 (Diesel) to s/n 8262800 (1960-1966) LCK 431 (Industrial) (Vertical round body)	Weight: 6 lbs. Length: 26" Outlet O.D.: 2 1/2" Outlet Length: 4 3/4" Shell Length: 17" Inlet I.D.: 2 1/2" Inlet Length: 4 1/4" Shell Diameter: 4 1/4"
MUFCA7 Replaces G45239 Inlet Clamp: MC212 Rain Cap: RC3	530, 630, 640 & 641 (Gas & Diesel) (1960-1969) (Vertical round body)	Weight: 7 lbs. Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 4 1/2" Shell Length: 17" Inlet I.D.: 2 1/2" Inlet Length: 7 1/2" Shell Diameter: 4 1/4"
MUFCA8 Replaces G45703 Inlet Clamp: MC178 Rain Cap: RC2	500 (Gas)-(1955-1957) 530 (Gas)-to s/n 81911470 (1960-1962) (Horizontal round body)	Weight: 5 lbs. Length: 19" Outlet O.D.: 2" Outlet Length: 2 3/4" Shell Length: 13 1/2" Inlet I.D.: 1 7/8" Inlet Length: 2 3/4" Shell Diameter: 4 1/4"
MUFCA10 Replaces G45727 Inlet Clamp: MC214 Rain Cap: RC5	600B, 610B, 611B (1957-58) (vertical) (Vertical round body)	Weight: 5 lbs. Length: 29" Outlet O.D.: 2 1/4" Outlet Length: 8 1/4" Shell Length: 17" Inlet I.D.: 2 1/8" Inlet Length: 3 3/4" Shell Diameter: 4 1/4"

PART NO.	FOR MODELS	SPECS.
MUFCA11 Replaces A24314 Inlet Clamp: MC212 Rain Cap: RC3	730, 730C, 830 & 830C (1960-1969) (Gas and Diesel) Note: Long muffler (Vertical round body)	Weight: 7 lbs. Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 4 1/2" Shell Length: 17" Inlet I.D.: 2 1/2" Inlet Length: 7 1/2" Shell Diameter: 4 1/4"
MUFCA12 Replaces A24314 Inlet Clamp: MC212 Rain Cap: RC3	730, 740, 830, 840 (1960-1969) Gas & Diesel Short muffler - also see CA11 above. (Vertical round body)	Weight: 6 lbs. Length: 26" Outlet O.D.: 2 1/2" Outlet Length: 3 1/4" Shell Length: 17 1/4" Inlet I.D.: 2 1/2" Inlet Length: 5 1/2" Shell Diameter: 5 1/2"
MUFCA13 Replaces 06705AB Inlet Clamp: MC234 Rain Cap: RC7	L, LA, LA1, LAE, LAH, LA1H (ag & Ind.) (to 1954)-(all Gas & Diesel) 500 (Diesel)-(1955-1957) 900 (Diesel)-(1958-1959) (Vertical round body)	Weight: 6 lbs. Length: 26" Outlet O.D.: 2 3/4" Outlet Length: 6 1/2" Shell Length: 15" Inlet I.D.: 2 3/4" Inlet Length: 4 1/2" Shell Diameter: 6"
MUFCA14 Replaces T42286 A24103 A27105 Inlet Clamp: MC234 Rain Cap: RC7	930 & 940 (Gas & Diesel)(1960-1969) 930 CK (Diesel) & 1030 (Diesel)-(1960-1969) (Vertical round body)	Weight: 9 lbs. Length: 32" Outlet O.D.: 2 3/4" Outlet Length: 12" Shell Length: 17" Inlet I.D.: 2 3/4" Inlet Length: 3" Shell Diameter: 5 1/2"
MUFCA16 Replaces A59765 Inlet Clamp: MC234 Rain Cap: RC7	970 & 1070 (Gas & diesel)-(1970 & Up) Note: muffler includes heat shield (Vertical round body)	Weight: 15 lbs. Length: 44" Outlet O.D.: 2 3/4" Outlet Length: 8" Shell Length: 27" Inlet I.D.: 2 3/4" Inlet Length: 9" Shell Diameter: 6"
MUFCA16-1 Replaces A59765 Inlet Clamp: MC234 Rain Cap: RC7	970 & 1070 (Gas & diesel)-(1970 & Up) (Vertical oval body)	Weight: 15 lbs. Length: 44" Outlet O.D.: 2 3/4" Outlet Length: 6 1/2" Shell Length: 32 1/2" Inlet I.D.: 2 3/4" Inlet Length: 5" Shell Diameter: 6" x 10"
MUFCA17 Replaces A64990 Inlet Clamp: MC312 Rain Cap: RC8	1170, 1175 & 1270 (D451T engine) 1370 (D504T engine)- (all diesel) (1970-1974) (Vertical round body)	Weight: 13 lbs. Length: 42" Outlet O.D.: 3 1/2" Outlet Length: 10" Shell Length: 28 3/4" Inlet I.D.: 3 1/2" Inlet Length: 3 1/4" Shell Diameter: 5 1/2"
MUFCA18 Replaces A39561 Inlet Clamp: MC212 Rain Cap: RC2	470 & 570 - (1970 to 1973) 480 & 580 Industrial (1970 & up) (all above-Gas & Diesel) (Vertical oval body)	Weight: 13 lbs. Length: 33" Outlet O.D.: 2" Outlet Length: 8 1/2" Shell Length: 19" Inlet I.D.: 2 1/2" Inlet Length: 5 1/2" Shell Diameter: 4 1/2" x 9"



Case Tractors

PART NO.	FOR MODELS	SPECS.
MUFCA20 Replaces A66780 Inlet Clamp: MC312 Rain Cap: RC10	1370 (D504T engine)-(1973 & up). Application Note: Aspirator tube in base has 2-bolt flange. Also, see MUF CAE1 for extension pipe. (Vertical oval body)	Weight: 19 lbs. Length: 29" Outlet O.D.: 4 1/8" Outlet Length: 5 3/4" Shell Length: 18 1/4" Inlet I.D.: 3 1/2" Inlet Length: 5" Shell Dia: 6 1/2" x 10 1/2"
MUFCA22 Replaces A147065 Inlet Clamp: MC312 Rain Cap: RC10	2090, 2290, (Diesel)-(1978 & up). 2294-1983-87 504 BDT Diesel Application note: Muffler has 1" dia. Side aspirator tube; See MUF CAE2 for extension pipe. Note: Muffler is base plate mounted. (3 holes) (Vertical oval body)	Weight: 25 lbs. Length: 31" Outlet O.D.: 4 1/8" Outlet Length: 4 1/2" Shell Length: 26 1/2" Inlet I.D.: 3 1/2" Inlet Length: 3" Shell Dia: 6 1/2" x 10 1/2"
MUFCA23 Replaces A147100 Inlet Clamp: MC400 Rain Cap: RC10	2390, 2394, 2590, 2594 (Dsl) (1978 & up). Application note: Muffler has 1-1/4" dia. Side aspirator tube; See MUF CAE2 for extension pipe. Note: Muffler is base plate mounted. (3 holes) (Vertical oval body)	Weight: 25 lbs. Length: 31" Outlet O.D.: 4 1/8" Outlet Length: 4 1/2" Shell Length: 26 1/2" Inlet I.D.: 4" Inlet Length: 3" Shell Dia: 6 1/2" x 10 1/2"
MUFCA26 Replaces K302951 Rain Cap: RC2	1290 & 1390 Diesel Tractors 1294 & 1394 (Vertical oval body)	Weight: 7 lbs. Length: 37" Outlet O.D.: 2 1/4" Outlet Length: 14" Shell Length: 16" Inlet I.D.: 2 1/4" Inlet Length: 7" Shell Diameter: 3 1/2" x 7"
MUFCA29 Replaces A147044 Inlet Clamp: MC400 Rain Cap: RC10	2470 Diesel. Note: Muffler has straight aspirator tube in base with 2-bolt baseplate. (Vertical oval body)	Weight: 25 lbs. Length: 27" Outlet O.D.: 4 1/8" Outlet Length: 5 1/2" Shell Length: 18" Inlet I.D.: 4" Inlet Length: 3 1/2" Shell Dia: 6 1/2" x 10 1/2"
MUFCA30 Replaces A147046 Inlet Clamp: MC400	2670 Note: Muffler has curved aspirator 1 1/4" with 2-hole baseplate. (Vertical oval body)	Weight: 34 lbs. Length: 54" Outlet O.D.: Bent pipe Outlet Length: 23" Shell Length: 28" Inlet I.D.: 4" Inlet Length: 2 1/2" Shell Dia: 8" x 11 1/2"
MUFCA31 Replaces A160176	2090, 2094 Non-aspirated. Application note: Muffler has 4 hole mounting plate side inlet. (Vertical oval body)	Weight: 21 lbs. Length: 29 1/2" Outlet O.D.: 3 1/8" Outlet Length: 3 1/2" Shell Length: 26" Inlet I.D.: 4 Hole baseplate Inlet Length: 6" Shell Diameter: 6" x 10"
MUFCA33 Replaces A162464 Inlet Clamp: MC400	All 4690 (1979-1982) 4694 (1983-1986) 4490 & 4484 Note: Aspirated muffler. Aspirator is 1 1/2" OD	Weight: 26 lbs. Length: 35" Outlet O.D.: 4" Outlet Length: 4" Shell Length: 27" Inlet I.D.: 4" Inlet Length: 4" Shell Diameter: n/a

PART NO.	FOR MODELS	SPECS.
MUFCA34 Replaces 144057C5	5088, 5288, 5488 Note: 1086, 1486, 1586 must have aspirator kit installed. Aspirator is 1 1/2" OD.	Weight: 19 lbs. Length: 18" Outlet O.D.: 3 1/2" Outlet Length: 7 1/2" Shell Length: 18" Inlet I.D.: 3 1/2" Inlet Length: 1" Shell Diameter: n/a
MUFCA35 Replaces 181372 Inlet Clamp: MC400	3294, 3394, 3594 Note: Muffler has 1 1/4" bent aspirator tube. Muffler has a 3 bolt hole mounting bracket.	Weight: 30 lbs. Length: 31" Outlet O.D.: 4 1/8" Outlet Length: 3 1/4" Shell Length: 26" Inlet I.D.: 4" Inlet Length: 1 3/4" Shell Diameter: n/a
MUFCA36 Replaces 184475 87704568 Inlet Clamp: MC300	5130, 5140 Maxxum 5230, 5240, 5250 Maxxum Note: Muffler has 2 bolt mounting brackets on both sides. (Horizontal oval body)	Weight: n/a Length: 21" Outlet O.D.: 3" Outlet Length: 4" Shell Length: 20" Inlet I.D.: 3" Inlet Length: 2" Shell Diameter: 5" x 11"
MUFCA37 Replaces OEM A184460 Inlet Clamp CL-300	5120, 5220 Maxxum Applicatuib note: Muffler has 2 bolt mounting brackets on both sides. (Horizontal oval body, Shell 5" x 11")	Weight: 16 lbs. Length: 21" Outlet O.D.: 3" Outlet Length: 4" Shell Length: 21" Inlet I.D.: 3" Inlet Length: 3" Shell Diameter: 5" x 11"
MUFCA38 Replaces	395, 495, 595, 695, 895 3220 after s/n 11070000, 3230, 4210, 4230 Years 1990 - 1994 (Horizontal - Round Body. Shell 4-1/4" dia.)	Weight: 8lbs. Length: 47" Outlet O.D.: 2" Outlet Length: 27-1/2" Shell Length: 17-1/2"" Inlet I.D.: 1-15/16" Inlet Length: 2" Shell Diameter: 5" x 11"

Case Exhaust Pipe

PART NO.	FOR MODELS	SPECS.
MUFCAE2 Replaces A141777 A181267 Inlet Clamp: MC412	2090, 2094, 2290 & 2294 (w/CA-22mfir) 2390, 2394, 2590, & 2594 (w/CA23 mfir) Note: Extension pipe with angled outlet; used on CA22 & CA23 mufflers.	Weight: 9 lbs. Length: 38" Outlet O.D.: angled Outlet Length: n/a Shell Length: n/a Inlet I.D.: 4 1/8" Inlet Length: n/a Shell Diameter: n/a

Case Combines

PART NO.	FOR MODELS	SPECS.
MUFCA101 Replaces F18685 Inlet Clamp: MC200 Outlet Clamp: MC200	700, 900, 960 (Vertical round body)	Weight: 4 lbs. Length: 17 1/2" Outlet O.D.: 2" Outlet Length: 3" Shell Length: 12" Inlet I.D.: 2" Inlet Length: 2 1/2" Shell Diameter: 4 1/4"

Cockshutt Tractors

PART NO.	FOR MODELS	SPECS.
MUFCO1 Replaces TG07530 Inlet Clamp: MC212 Rain Cap: RC3	40, R40, Golden Eagle, 50 (to 1958) 560 & 570 CO-OP E-4 & E-5 (1958) FARMCREST 40 & 50-all Gas/Diesel (Vertical round body)	Weight: 6 lbs. Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 14" Shell Length: 12 1/2" Inlet I.D.: 2 3/8" Inlet Length: 2 1/2" Shell Diameter: 6"
MUFCO2 Replaces T07530 Inlet Clamp: MC200 Rain Cap: RC2	30 & R30, (CO-OP E-3 and FARMCREST 30)-(Gas engine) (1939-1958) (Vertical round body)	Weight: 6 lbs. Length: 29" Outlet O.D.: 2" Outlet Length: 9" Shell Length: 17" Inlet I.D.: 1 15/16" Inlet Length: 2 3/4" Shell Diameter: 4 1/4"
MUFCO3 Replaces 164079A 166486A Inlet Clamp: MC212 Rain Cap: RC3	770 (Gas & Diesel), 1600 (Gas & Diesel) 1550 (Gas & Diesel) & 1650 (Gas) (Vertical round body)	Weight: 8 lbs. Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 7" Shell Length: 20" Inlet I.D.: 2 3/8" Inlet Length: 2 1/2" Shell Diameter: 4 1/4"
MUF CO4 Replaces 164080A Inlet Clamp: MC300 Rain Cap: RC3	1800 (Gas/Diesel), 1650 (Diesel); 1750 & 1850 (Gas & Diesel to 1968) Note: Includes heat shield. (Vertical round body)	Weight: 9 lbs. Length: 34" Outlet O.D.: 2 1/2" Outlet Length: 6" Shell Length: 23" Inlet I.D.: 2 15/16" Inlet Length: 4 1/2" Shell Diameter: 6"

John Deere Tractors

PART NO.	FOR MODELS	SPECS.
MUFJD1 Replaces R21826R R81826R	Model A, AR, AN, AW, ANH (Gas & all fuel) (s/n 410000 & up). Model 60, 620, 70, 720 (Gas & all fuel). Note: JD1 has a 4 bolt mounting plate. Uses manifold pipe JDE1 (AA4014R) (Vertical round body)	Weight: 7 lbs. Length: 21" Outlet O.D.: 2 5/8" Outlet Length: 2 1/2" Shell Length: 14 1/2" Inlet I.D.: Base plate Inlet Length: 4 1/2" Shell Diameter: 4 1/4"
MUFJD3 Replaces AF3770R AA2214R	Model A, AR, AN, AW & AWH (33-52) Model G, GN, GH & GW (1938-1953) (Gas & all fuel). s/n 410000 & up. Model 60, 620, 70, 720 (Gas & all fuel) Original equipment standard muffler. Note: JD3 has a 4-bolt mounting plate. (Vertical round body)	Weight: 5 lbs. Length: 24 1/2" Outlet O.D.: 2 1/2" Outlet Length: 1" Shell Length: 23" Inlet I.D.: Base plate Inlet Length: n/a Shell Diameter: 3 3/4"
MUFJD5 Replaces AM364T AM625T Rain Cap: RC2	M, MT, MC & MI (1947-1952). 40 (all 53-56), 320 & 330 (57-59). Note: 2 Bolt-flange mount; 1-7/8" OD. (Vertical & Horizontal round body)	Weight: 5 lbs. Length: 21" Outlet O.D.: 2" Outlet Length: 3 1/4" Shell Length: 14 1/2" Inlet I.D.: 1 3/4" Inlet Length: 3 1/4" Shell Diameter: 3 1/4"
MUFJD8 Replaces AT10646T AM3101T Inlet Clamp: MC200 Rain Cap: RC2	320, 330 & 420 (Gas) s/n 135025 & up. 430 & 440 (Gas), 435 (Diesel) (s/n 442886 & up)-(1957-1959). 1010 (Gas) (all types with vertical exhaust). (Vertical round body)	Weight: 4 lbs. Length: 17 1/2" Outlet O.D.: 2" Outlet Length: 3" Shell Length: 12 1/4" Inlet I.D.: 2" Inlet Length: 2 1/4" Shell Diameter: 4 1/4"
MUFJD9 Replaces AT10899T Inlet Clamp: MC200	330 (Gas), 435 & 440 (Diesel) (1957-1959). 1010 (RS & U) (Gas). Note: Muffler has side inlet. (Horizontal round body)	Weight: 5 lbs. Length: 19" Outlet O.D.: 2" Outlet Length: 3 1/4" Shell Length: 15 3/4" Inlet I.D.: 2" Inlet Length: 2" Shell Diameter: 4 1/4"
MUFJD12 Replaces AT13310 Inlet Clamp: MC214 Rain Cap: RC3	1010 (Diesel)- to s/n 031000. 2010 (Diesel)- to s/n 029000. Row Crop Models. (Vertical round body)	Weight: 6 lbs. Length: 26" Outlet O.D.: 2 1/4" Outlet Length: 3 1/2" Shell Length: 20" Inlet I.D.: 2 3/16" Inlet Length: 2 3/4" Shell Diameter: 4 1/4"
MUFJD14 Replaces AT21689 AT64102 Rain Cap: RC2	1020, 1520, 1530, 2020, 2030, 2130, 2040, 2240, 2630, 2640 (s/n 341000 & up) (all Gas & Diesel). Note: Inlet is flared; uses special clamp. (Vertical oval body)	Weight: 12 lbs. Length: 30" Outlet O.D.: 2" Outlet Length: 7 3/4" Shell Length: 19 1/2" Inlet I.D.: 2 1/2" Inlet Length: 3 1/2" Shell Dia: 4 1/4" x 9"
MUFJD17 Replaces AR21805R AR20819R Rain Cap: RC8	Model 80, 820 (Optional) 830 & 830I standard equipment. (Vertical oval body)	Weight: 12 lbs. Length: 19" Outlet O.D.: 3 1/2" Outlet Length: 2 3/4" Shell Length: 14 1/4" Inlet I.D.: 3 3/8" Inlet Length: 2 1/2" Shell Dia: 9 1/2" x 5 1/2"

David Brown Tractors

PART NO.	FOR MODELS	SPECS.
MUFDB1 Replaces K914137 K924341 Inlet Clamp: MC178 Rain Cap: RC2	770, late 880, 885, 995 & 1200 (Vertical round body)	Weight: 7 lbs. Length: 35" Outlet O.D.: 2" Outlet Length: 6" Shell Length: 20" Inlet I.D.: 1 7/8" Inlet Length: 9" Shell Diameter: 4 1/4"
MUFDB2 Replaces K914083 K921351 Inlet Clamp: MC158 Rain Cap: RC1	880, 990 (61-78); 1200 (67-71)-(Diesel) (Vertical round body)	Weight: 6 lbs. Length: 34" Outlet O.D.: 1 3/4" Outlet Length: 5" Shell Length: 20" Inlet I.D.: 1 5/8" Inlet Length: 9" Shell Diameter: 4 1/4"
MUFDB3 Replaces K262843 K926833 K928712 K9928704 Inlet Clamp: MC178 Rain Cap: RC2	770, 780, 880 & 885. Also fits 990, 995, 996 & 1200 (use adapter) #B928257. 1210 & 1212 (71-80) all Diesel. (Vertical oval body)	Weight: 8 lbs. Length: 34" Outlet O.D.: 2" Outlet Length: 6 1/4" Shell Length: 16" Inlet I.D.: 1 7/8" Inlet Length: 11 1/2" Shell Diameter: 4" x 8"

John Deere Tractors

PART NO.	FOR MODELS	SPECS.
MUFJD20 Replaces AR38383 AR61073 AR86599 Rain Cap: RC3	2510 (Gas & Diesel) Row Crop Models. Also fits 2320-2420 Windrower. Note: This muffler also used on non-tractor engines: 316D, 4239D & DT and 4276D & DT. Note: Inlet is flared; uses special clamp.(Vertical round body)	Weight: 8 lbs. Length: 34" Outlet O.D.: 2 1/2" Outlet Length: 6 1/4" Shell Length: 20" Inlet I.D.: 2 1/2" Inlet Length: 7 1/2" Shell Diameter: 4 1/4"
MUFJD21 Replaces AR26640 AR26786 Inlet Clamp: MC300 Rain Cap: RC7	3010 (Gas & LP)-(Diesel-to s/n 1T 6643) 3020 (Gas & LP) 4010 (Gas & LP)-(Diesel-to s/n 2T 7026) 4020 & 4000 (Gas & LP). Note: See JD22 for round body muffler with flared inlet. (Vertical round body)	Weight: 10 lbs. Length: 26" Outlet O.D.: 2 5/8" Outlet Length: 3" Shell Length: 20" Inlet I.D.: 2 15/16" Inlet Length: 3" Shell Diameter: 6"
MUFJD22 Replaces AR30189 AR30190 Inlet Clamp: MC300 Rain Cap: RC7	3020 (Diesel)- to s/n 122999; 4010 (Diesel)- s/n 2T 7027 & up; 4020 (Diesel)-to s/n 200999. Note: Inlet is flared, uses special clamp JD300. (Vertical round body)	Weight: 11 lbs. Length: 26" Outlet O.D.: 2 5/8" Outlet Length: 3" Shell Length: 20" Inlet I.D.: 2 15/16" Inlet Length: 3" Shell Diameter: 6"
MUFJD24 Replaces AR41171 AR86595 Inlet Clamp: MC300 Rain Cap: RC5	3020 (Diesel)- s/n 123000 & up, 4020 & 4000 (Diesel) -s/n 201000 & up. 4030, 4230, 4040, 4240 & 4440. Note: This muffler also used on stationary & industrial non-tractor applications; ENG-400, ENG-500, 6466D (T&A)-Diesel. (Vertical round body)	Weight: 12 lbs. Length: 27" Outlet O.D.: 2 1/4" Outlet Length: 4" Shell Length: 19 1/4" Inlet I.D.: 2 15/16" Inlet Length: 4 1/2" Shell Dia: 4 1/4" x 9"
MUFJD26 Replaces AR48773 AR61073 AR86599 RE20224 Inlet Clamp: MC400A Rain Cap: RC8	4040, 4050, 4240, 4320, 4430, 4440, 4630, 4640 (s/n 5511 & up). 4055, 4250, 4255, 4450, 4455, 4840. Note: This muffler used on other non-tractor applications. ENG 4239 D&T, 4276 D&T, 6359 D&T, 6414 D&T, 6466 D&T, Inlet clamp MUF JD400A is included.(Vertical oval body)	Weight: 20 lbs. Length: 37" Outlet O.D.: 3 1/2" Outlet Length: 3" Shell Length: 33" Inlet I.D.: 3 15/16" Inlet Length: 1 1/2" Shell Dia: 4 3/4" x 8"
MUFJD33 Replaces RE 20220 AR 86597 Inlet Clamp: MC300A Rain Cap: RC7	4040, 4240, 4250, 4440, 4450, 4050 (prior to s/n 5510). Note: NEW DESIGN! Replaces flared inlet muffler. Inlet clamp included. (Vertical oval body)	Weight: 16 lbs. Length: 34" Outlet O.D.: 2 5/8" Outlet Length: 2 1/2" Shell Length: 27 1/4" Inlet I.D.: 2 15/16" Inlet Length: 5" Shell Diameter: 4 3/4" x 8"
MUFJD35 Replaces CH15910	650, 750 4-Hole baseplate Note: Inlet has 4 hole baseplate. For short extension see JD37. For longer extension use EE2 (Vertical or Horizontal oval body)	Weight: 5 lbs. Length: 20" Outlet O.D.: 1 3/4" Outlet Length: 5 1/2" Shell Length: 11 1/2" Inlet I.D.: Base Plate Inlet Length: 2" Shell Diameter: 3" x 7"

PART NO.	FOR MODELS	SPECS.
MUF JD37 Replaces CH15625 Inlet Clamp: MC178	Short Extender for MUF JD35 & MUF JD36 for longer extension, see exhaust extenders or straight pipes.	Weight: 2 lbs. Length: 6" Outlet O.D.: n/a Outlet Length: n/a Shell Length: n/a Inlet I.D.: n/a Inlet Length: 1 7/8" 
MUF JD38 Replaces AR20449	50, 520, 530 4-Hole baseplate Note: Inlet has 4 hole baseplate. (Vertical oval body)	Weight: 9 lbs. Length: 22 3/4" Outlet O.D.: 2 1/4" Outlet Length: 2" Shell Length: 19" Inlet I.D.: Base plate Inlet Length: 1 1/2" Shell Diameter: 4 1/2" x 9"
MUF JD39 Replaces AR53749 Inlet Clamp: MC400 Rain Cap: RC9	6030 turbo, 1972-77 will not fit non-turbo. 7020 turbo, 1971-75 engine S/N 335846 & up. 7520 4-wheel drive with turbo 1972-75. (Vertical oval body)	Weight: 18 lbs. Length: 36 1/2" Outlet O.D.: 4" Outlet Length: 5" Shell Length: 30" Inlet I.D.: 3 15/16" Inlet Length: 1 1/2" Shell Dia: 5 1/2" x 9 1/2"
MUF JD40 Replaces RE44716 Inlet Clamp: MC500	8100, 8200, 8300, 8400, 8110, 8210, 8310, 8410 (Vertical oval body)	Weight: n/a Length: 66" Outlet O.D.: Bent pipe Outlet Length: 22" Shell Length: 40" Inlet I.D.: 5" Inlet Length: 3 1/2" Shell Diameter: 7"
MUF JD42 Replaces RE25444 RE41891	8560, 8760, 8960 - years 1989-1993 Note: Muffler has a 1 1/2" side aspirator pipe and 6 hole inlet mounting flange. (Vertical oval body)	Weight: n/a Length: 52" Outlet O.D.: 5" Outlet Length: 5" Shell Length: 41" Inlet I.D.: 5" Inlet Length: 5" Shell Diameter: 9"
MUF JD43 Replaces RE229262 Inlet Clamp: MC500	9100, 9200, 9300, 9400 years 1996-2002 Note: Muffler has a 2" side aspirator pipe. (Vertical oval body)	Weight: n/a Length: 55 1/2" Outlet O.D.: 5" Outlet Length: 9 1/2" Shell Length: 41" Inlet I.D.: 5" Inlet Length: 3 1/2" Shell Diameter: 9"
MUF JD44 Replaces RE58615 Inlet Clamp: MC500	8570, 8770, 8870 - years Note: Muffler has a 1 1/2" side aspirator pipe and 3 hole mounting flange. (Vertical round body)	Weight: n/a Length: 46" Outlet O.D.: 5" Outlet Length: 3" Shell Length: 42" Inlet I.D.: 5" Inlet Length: 3 1/2" Shell Diameter: 9"

John Deere Muffler & Pipe Kit

PART NO.	FOR MODELS	SPECS.
MUF JD2950K Rain cap: RC7	Muffler & pipe kit converts underhood muffler to above hood muffler and vertical pipe. 2840(late s/n), 2940, 2950, 2955, 3055, 3150, and 3155 (non-turbo) diesel engine. Kit contains: Manifold to muffler pipe has flared inlet, muffler, above hood pipe, clamps and raincap. Muffler: (Vertical oval body.)	Weight: 22" Length: 24" Outlet O.D.: 2 3/4" Outlet Length: 4 1/2" Shell Length: 17 1/2" Inlet I.D.: 2 3/4" Inlet Length: 2 1/2" Shell Diameter: 5/8" x 9 1/2"



Ford New Holland Tractors

PART NO.	FOR MODELS	SPECS.	
MUFFO1	Major Diesel (1952-1964) (4 cyl. Ford Diesel engines) (Vertical round body)	Weight: 7 lbs. Length: 35" Outlet O.D.: 2" Outlet Length: 9" Shell Length: 17" Inlet I.D.: 1 7/8" Inlet Length: 9" Shell Diameter: 4 1/4"	
MUFFO2	Delta (Diesel-144 & 152 c.i.d.) (1957-1964) (3 cyl. Perkins Diesel engines) (Vertical round body)	Weight: 6 lbs. Length: 34" Outlet O.D.: 1 3/4" Outlet Length: 3 1/2" Shell Length: 17" Inlet I.D.: 1 5/8" Inlet Length: 13" Shell Diameter: 4 1/4"	
MUFFO3	9N, 2N, & 8N (1939-1952)-(Gas) Note: Welded one-piece horizontal assembly, with flared inlet.	Weight: 6 lbs. Length: 53" Outlet O.D.: n/a Outlet Length: n/a Shell Length: n/a Inlet I.D.: n/a Inlet Length: n/a Shell Diameter: n/a	
MUFFO4	Replaces NAA 5230E Inlet Clamp: MC158 Outlet Clamp: MC158	NAA (53-54), 600 & 700 (55-57), 501, 601, & 701 (58-62), 2000 series (63-64) with 134 c.i.d. Gas., 800 & 900 (55-57) with 172 cid Gas. 860 Jubilee (with FOE1, FOE3). Note: Use FO4A for manifold elbow. (Horizontal round body)	Weight: 4 lbs. Length: 17 1/2" Outlet O.D.: 1 5/8" Outlet Length: 2 1/4" Shell Length: 13" Inlet I.D.: 1 5/8" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"
MUFFO11	Custom Design Inlet Clamp: MC112 Rain Cap: RC0	9N (1939-1942), 2N (1942-1947) & 8N (1948-1952). Note: Use to replace muffler in VERTICAL exhaust systems FO9 & FO10. (Vertical round body)	Weight: 3 lbs. Length: 17 " Outlet O.D.: 1 1/2" Outlet Length: 4" Shell Length: 11 1/4" Inlet I.D.: 1 1/2" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"
MUFFO14	Replaces 310079 Inlet Clamp: MC200 Outlet Clamp: MC178	801, -901 (58-62), 4000 series (61-64), & 1801 (58-60) with 172 cid Gas & Diesel. 501, 601, 701 (58-62), 861 Power master 2000 series (63-64) with 144 cid Diesel. 4000 (65-75), 3600 & 4600 (75-81) 3 Cyl. diesel - All Orchard & Narrow. Note: Uses FO14A for manifold elbow. (Horizontal round body)	Weight: 3 lbs. Length: 17 1/2" Outlet O.D.: 1 5/8" Outlet Length: 2" Shell Length: 13 1/2" Inlet I.D.: 2" Inlet Length: 2" Shell Diameter: 3 1/2"
MUFFO17	Replaces C7NN5230Z C7NN5230AB C7NN5230AC Inlet Clamp: MC178 Rain Cap: RC2	2000, 3000, 4000 & 5000 (68 & up) 3 cyl & 4 cyl. Gas & Diesel. (Vertical round body)	Weight: 7 lbs. Length: 29" Outlet O.D.: 2" Outlet Length: 7 1/2" Shell Length: 17" Inlet I.D.: 1 7/8" Inlet Length: 4 1/2" Shell Diameter: 5 1/2"

John Deere Combines

PART NO.	FOR MODELS	SPECS.
MUFJD104 Replaces AP26196H Inlet Clamp: MC212	45 Gas & LP-HA145 engine-(s/n 45-8432 to 45-21500). (Horizontal round body)	Weight: 11 lbs. Length: 20 1/4" Outlet O.D.: 2" Outlet Length: 4 1/4" Shell Length: 16" Inlet I.D.: 2 1/2" Inlet Length: 2 1/2" Shell Diameter: 4 1/4"
MUFJD105 Replaces AP26767H Inlet Clamp: MC212	45 (Diesel-HA155/165)-s/n 8000 & up. 55 (Gas-HA217)-s/n 46801-57000. 65 (Gas-HC217)-s/n 11001-11600. 65 (Gas-HE217)-s/n 11601 & up. (Vertical round body)	Weight: 6 lbs. Length: 24" Outlet O.D.: 2 1/2" Outlet Length: 5" Shell Length: 19 3/4" Inlet I.D.: 2 1/2" Inlet Length: 2 1/2" Shell Diameter: 4 1/4"
MUFJD108 Replaces AH87289 Inlet Clamp: MC234	3300, 4400, 4420, 6600, 6620, 7700. Note: Naturally aspirated. (Horizontal round body)	Weight: 12 lbs. Length: 23" Outlet O.D.: 2 1/2" Outlet Length: 2 1/2" Shell Length: 20" Inlet I.D.: 2 3/4" Inlet Length: 4" Shell Diameter: 7"



Ford New Holland Tractors

PART NO.	FOR MODELS	SPECS.
MUFFO23	7000, 7100 & 7200 (75-76) 4 cyl. dsl (Vertical round body)	Weight: 7 lbs. Length: 36" Outlet O.D.: 2 1/2" Outlet Length: 7 1/2" Shell Length: 24" Inlet I.D.: 2 1/8" Inlet Length: 4 1/2" Shell Diameter: 4 1/4"
Replaces D2NN5230A Inlet Clamp: MC212 Rain Cap: RC3		
MUFFO24	2000, 3000, 4000 & 5000 series (75 up) 3 cyl. & 4 cyl. Gas, LP & Diesel. (Vertical oval body)	Weight: 13 lbs. Length: 39" Outlet O.D.: 2" Outlet Length: 9" Shell Length: 26" Inlet I.D.: 1 1/8" Inlet Length: 4" Shell Diameter: 4 1/2" x 9"
Replaces D5NN5230D D5NN5230E Inlet Clamp: MC178 F		
MUFFO25	750 Loader (1975-81) 5110 (1984-91) 5610, 6410, 6610, 6710, 7000, 7100, 7200, 7600, 7610, 700 Turbo 1977 & up 7710 (75 up) 4 cyl. diesel. Note: for curved outlet use EE-5 extender. (Vertical oval body)	Weight: 14 lbs. Length: 38" Outlet O.D.: 2 1/2" Outlet Length: 8" Shell Length: 26" Inlet I.D.: 2 1/8" Inlet Length: 4" Shell Diameter: 4 1/2" x 9"
Replaces D5NN5230F D5NN5230V D9N- N5230FA17M E4NN- 5230DA17M Inlet Clamp: MC212 Rain Cap: RC3		
MUFFO27	8700 - 6 cyl. Diesel (76-78) (Vertical oval body)	Weight: 17 lbs. Length: 44" Outlet O.D.: 3" Outlet Length: 10 1/4" Shell Length: 31 1/4" Inlet I.D.: 2 1/4" Inlet Length: 2" Shell Diameter: 5" x 11"
Replaces D5NN5230S Inlet Clamp: MC234 Rain Cap: RC4		
MUFFO28	2910, 3910, 4000, 4110 (81-85), 4130, 4600, 4610 (65-82) 4630 3 cyl. Diesel 5000, 5600, 5610, 5700, 6600 & 6700 (65-80) w/cab. 4 cyl. Diesel Ag. 515, 531, 535 & 545(78-82) - w/cab 3 cyl. Diesel Industrial. (Vertical oval body)	Weight: 13 lbs. Length: 41" Outlet O.D.: 2" Outlet Length: 8 1/2" Shell Length: 26 1/2" Inlet I.D.: 1 1/8" Inlet Length: 6" Shell Diameter: 4 1/2" x 9"
Replaces E4NN5230GB Inlet Clamp: MC178		
MUFFO33	1110, 1210, 1215, 1310, 1320, 1510, 1710, 1910, (1983-1987) (Vertical round body)	Weight: 5 lbs. Length: 24" Outlet O.D.: 1 1/2" Outlet Length: 2" Shell Length: 15" Inlet I.D.: Base plate Inlet Length: 6" Shell Dia: 3 1/4"
Replaces 314100521 Rain Cap: RC0		
MUF FO38	TW-5, TW-10 (Vertical oval body)	Weight: 19 lbs. Length: 47" Outlet O.D.: 2 1/4" Outlet Length: Bent pipe Shell Length: 31 1/8" Inlet I.D.: 2 1/4" Inlet Length: 2" Shell Dia: 5" x 11"
Replaces E4NN5230 CA17M Inlet Clamp: MC234		

PART NO.	FOR MODELS	SPECS.
MUFFO39	256 V (1984-1985) Versatile with Cummins / Ford engine, 276 II, 276V (Vertical oval body)	Weight: 12 lbs. Length: 33 1/2" Outlet O.D.: 2 3/4" Outlet Length: Bent pipe Shell Length: 18" Inlet I.D.: 3" Inlet Length: 2 1/4" Shell Dia: 4" x 9"
Replaces 0970014 Inlet Clamp: MC212		
MUFFO40	9030 E, 9030 V (1990-1997) Bi-directional tractor Vertical oval body. (Vertical oval body)	Weight: 13 lbs. Length: 43" Outlet O.D.: 2 3/4" Outlet Length: Bent pipe Shell Length: 18" Inlet I.D.: 3" Inlet Length: 2 1/4" Shell Dia: 4" x 9"
Replaces 09702857 Inlet Clamp: MC234		
MUFFO41	550 3 cyl. (1975-1978) Gas/Diesel Loader/Backhoe 3930 (Vertical round body)	Weight: 13 lbs. Length: 60" Outlet O.D.: 2" Outlet Length: Bent pipe Shell Length: 26" Inlet I.D.: 1 1/8" Inlet Length: 3 3/4" Shell Dia: 5 1/2"
Replaces D9NN5230 HA17M Inlet Clamp: MC178		
MUFFO42	6 cyl. loader (1974-1983) (Vertical round body)	Weight: 20 lbs. Length: 32" Outlet I.D.: 3" Outlet Length: 3" Shell Length: 27 1/2" Inlet I.D.: 3" Inlet Length: 1 1/2" Shell Dia: 9"
Replaces D4NN5230F Inlet Clamp: MC314		
MUFFO43	4835 4 cyl. 1996 (Vertical round body)	Weight: 8 lbs. Length: 31" Outlet I.D.: 2 1/4" Outlet Length: 11" Shell Length: 15" Inlet I.D.: 2 3/8" Inlet Length: 5" Shell Dia: 6"
Replaces 83959846 Inlet Clamp: MC212		

International Tractors

PART NO.	FOR MODELS	SPECS.
MUFIH1	Farmall Cub - Standard (not Lo-Boy) (Vertical-round Body).	Weight: 5 lbs. Horizontal Length: 22" Outlet O.D.: 1 1/2" Outlet Length: 6 3/4" Shell Length: 12 1/2" Inlet I.D.: 1 3/8" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"
Replaces 351436R92 Inlet Clamp: MC112 Rain cap: RC0		
MUFIH3	Farmall A, Super A, B, BN, C & Super C (1939-1954). Farmall 100, 130, 140, 200, 230 & 240 (C-123 Gas Engine). Farmall 330 & 340 (C-135 Gas Engine) International 330 & 340 (Utility C-135 Gas Engine). Also T-340 Crawler (C-135 Gas engine). (Vertical round body)	Weight: 6 lbs. Horizontal Length: 29" Outlet O.D.: 2" Outlet Length: 9 1/4" Shell Length: 17" Inlet I.D.: 1 15/16" Inlet Length: 2 3/4" Shell Diameter: 4 1/4"
Replaces 360720R91 360720R92 Inlet Clamp: MC200 Rain Cap: RC2		

International Tractors

PART NO.	FOR MODELS	SPECS.
MUFIH4 Replaces 350600R95 350660R95 Inlet Clamp: MC212 Rain Cap: RC3	Farmall H & International W4 (with C152 gas engine) Super H & Super W4 (with C164 gas engine) Farmall 300 & 350 (C169 & C175 gas engine) Note: This is original style muffler, OEM style subs to IH10.(Vertical round body)	Weight: 6 lbs. Horizontal Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 11 3/4" Shell Length: 14 1/2" Inlet I.D.: 2 3/8" Inlet Length: 2 1/2" Shell Diameter: 5 1/2"
MUFIH6 Replaces 365966R91 Inlet Clamp: MC158 Outlet Clamp: MC134	International 300 (s/n 62493 & up) and International 350 (s/n 501 & up) both use C175 Gas. International 504 (s/n 3104 & up, with C135 gas engine) (Horizontal round body)	Weight: 5 lbs. Horizontal Length: 22 1/2" Outlet O.D.: 1 3/4" Outlet Length: 2 3/4" Shell Length: 16 3/4" Inlet I.D.: 1 5/8" Inlet Length: 2 3/4" Shell Diameter: 4 1/4"
MUFIH7 Replaces 704616R93 3109793R91 Inlet Clamp: MC200 Rain Cap: RC2	B275 & B414 Utility. (BD144 Diesel) (Vertical round body)	Weight: 6 lbs. Horizontal Length: 34" Outlet O.D.: 2" Outlet Length: 7" Shell Length: 20" Inlet I.D.: 2" Inlet Length: 6 3/4" Shell Diameter: 4 1/4"
MUFIH8 Replaces 3046362R91 Inlet Clamp: MC200 Rain Cap: RC2	B-414 (Utility) - (B-144 Gas) (Vertical round body).	Weight: 7 lbs. Horizontal Length: 41" Outlet O.D.: 2" Outlet Length: 7" Shell Length: 20" Inlet I.D.: 2" Inlet Length: 13" Shell Diameter: 4 1/4"
MUFIH9 Replaces 371039R91 371039R92 Inlet Clamp: MC178 Outlet Clamp: MC200	1963 - 330, 340, 560, I-560, 656 & 660 (C-263 Gas & D-282 Diesel). International 460 & 460 Grove (C-221 Gas & D-236), diesel 1968 - I-504 (D-188 Diesel) - s/n 3104 & up, I-606 - 2606 (C-221 Gas & D-236 Diesel engines). 1973 - 544-2544, 656-2656, 664 (Case) (Horizontal round body)	Weight: 5 lbs. Horizontal Length: 22 1/2" Outlet O.D.: 2" Outlet Length: 3" Shell Length: 17" Inlet I.D.: 1 7/8" Inlet Length: 3" Shell Diameter: 4 1/4"
MUFIH10 Replaces 350601R95 357288R92 370773R91 370644R91 Inlet Clamp: MC212 Rain Cap: RC3	Farmall H, Super H, M, Super M, MD, Super MD, Super MTA. also International W-4, S-W4, W6, S-W6, WD6 & S-WD6. (Gas & Diesel engines). Farmall 300 & 350 (C-175 Gas engine). Farmall 400 & 450 (C-281 Gas & D-281 Diesel engine) Farmall 460 & International 606 (C-221 Gas & D-236 Diesel engine). Farmall 560 (C-236 Gas & D-282 Diesel engine).(Vertical round body)	Weight: 8 lbs. Horizontal Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 14" Shell Length: 13" Inlet I.D.: 2 3/8" Inlet Length: 2 1/2" Shell Diameter: 6"

PART NO.	FOR MODELS	SPECS.
MUFIH12 Replaces 303973R91 264117R92 637661C1 Inlet Clamp: MC314 Rain Cap: RC4	W-9 (Gas), WD-9 (Diesel) T-9 (Gas), TD-9 & TD-14 (Diesel) International 600 & 650 (C-350 Gas & D-350 Diesel engines). (Vertical round body)	Weight: 6 lbs. Horizontal Length: 22" Outlet O.D.: 3" Outlet Length: 3 1/2" Shell Length: 14 1/2" Inlet I.D.: 3 1/8" Inlet Length: 2 1/2" Shell Diameter: 6"
MUFIH13 Replaces 384346R91 403551R1 Inlet Clamp: MC212 Rain Cap: RC3	706 (D-310 Diesel engine). Note: This is original style muffler. 464, 574, 615, 656, 664, 674, 715, 2500, 2656 w/engines BD154, C135, C146, C175, C200, D188, D236, D301 (Vertical round body)	Weight: 8 lbs. Horizontal Length: 34" Outlet O.D.: 2 1/2" Outlet Length: 14" Shell Length: 17" Inlet I.D.: 2 3/8" Inlet Length: 3" Shell Diameter: 5 1/2"
MUFIH14 Replaces 384345R1 384345R91 Inlet Clamp: MC300 Rain Cap: RC4	706 (C-263 Gas) & 806 (C-301 Gas & D-361 Diesel). (Vertical round body)	Weight: 8 lbs. Horizontal Length: 34" Outlet O.D.: 3" Outlet Length: 14" Shell Length: 17" Inlet I.D.: 2 15/16" Inlet Length: 3 1/2" Shell Diameter: 5 1/2"
MUFIH16 Replaces 264126R92 264126C4 Inlet Clamp: MC234 Rain Cap: RC7	F-20, F-30, W-30 (Gas) & TD-18 (Dsl) (Vertical round body)	Weight: 6 lbs. Horizontal Length: 26" Outlet O.D.: 2 3/4" Outlet Length: 6 1/2" Shell Length: 15" Inlet I.D.: 2 3/4" Inlet Length: 4 3/4" Shell Diameter: 4 1/4"
MUFIH18 Replaces 370664R1 Inlet Clamp: MC212 Rain Cap: RC3	Farmall 544 (C-200 Gas & D-239 Diesel) (Vertical round body)	Weight: 5 lbs. Horizontal Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 11 3/4" Shell Length: 14 1/2" Inlet I.D.: 2 3/8" Inlet Length: 2 1/2" Shell Diameter: 5 1/2"
MUFIH20 Replaces 393840R91	Cub Cadet Tractor models: 102, 104, 105, 106, 107, 122, 123, 125, 126 & 127 (using Kohler 10 & 12 hp 1 cyl. engines) (Horizontal round body)	Weight: 2.5 lbs. Horizontal Length: 15" Outlet O.D.: 1 5/16" Outlet Length: 2 1/2" Shell Length: 12 1/2" Inlet I.D.: 1 1/2" Inlet Length: 1 1/4" Shell Diameter: 3 1/4"

International Tractors

PART NO.	FOR MODELS	SPECS.
MUFIH24 Replaces 533924R1 Inlet Clamp: MC212 Rain Cap: RC2	I-454, 574, 674 & 684 Utility. (C-200 Gas & D-239 Diesel engine) (Vertical oval body)	Weight: 11 lbs. Horizontal Length: 30" Outlet O.D.: 2" Outlet Length: 9 1/2" Shell Length: 19" Inlet I.D.: 2 3/8" Inlet Length: 3 1/2" Shell Diameter: 4 1/2" x 9"
MUFIH25 Replaces 534546R1 Inlet Clamp: MC314 Rain Cap: RC4	766 (D-361 Diesel), 966 (D-414 Diesel) & H100 (D-436 Diesel engine). (Vertical oval body)	Weight: 16 lbs. Horizontal Length: 50" Outlet O.D.: 3" Outlet Length: 4" Shell Length: 23" Inlet I.D.: 3 3/16" Inlet Length: 22" Shell Diameter: 5" x 11"
MUFIH26 Replaces 534546R6 534546R3 Inlet Clamp: MC400 Rain Cap: RC8	1066 (DT-414 Diesel) & 1466, 1566 (DT-436 diesel engine). 4366, 4386 (Vertical oval body)	Weight: 17 lbs. Horizontal Length: 44" Outlet O.D.: 3 1/2" Outlet Length: 8 3/4" Shell Length: 23" Inlet I.D.: 3 3/4" Inlet Length: 12" Shell Diameter: 5" x 11"
MUFIH27 Replaces 530578R4 570578R3 Inlet Clamp: MC300 Rain Cap: RC4	666, 686, H70, H86, 706 & 766 (C-263 & C-291 Gas). 706 (D-310 diesel). 806 (D-301 Gas & D-361 Diesel). 826 & 856 (C-301 Gas) 856 (D-407 Diesel) (Vertical oval body)	Weight: 16 lbs. Horizontal Length: 34" Outlet O.D.: 3" Outlet Length: 8 1/4" Shell Length: 23" Inlet I.D.: 2 15/16" Inlet Length: 3 1/4" Shell Diameter: 5" x 11"
MUFIH102 Replaces 379936R91 Inlet Clamp: MC200	303 Combine (Gas engine) (Horizontal round body)	Weight: 6 lbs. Horizontal Length: 12" Outlet O.D.: 2 1/4" Outlet Length: 2" Shell Length: 10 1/2" Inlet I.D.: 2" Inlet Length: 2 1/4" Shell Diameter: 6"
MUF IH106 Replaces 401776R 548369R1 Inlet Clamp: MC300	715 Combine (Gas engine) (Horizontal round body)	Weight: 8 lbs. Horizontal Length: 30" Outlet O.D.: 3" Outlet Length: 17 1/2" Shell Length: 11 1/2" Inlet I.D.: 3" Inlet Length: 3" Shell Diameter: 7 1/2"

Massey Tractors

PART NO.	DESCRIPTION	SPECS.
MUFMF3 Replaces 187553M92 Inlet Clamp: MC214 Rain Cap: RC3	MF-85, MF-88 & MF-90 (Diesel) (Vertical round body)	Weight: 6 lbs. Horizontal Length: 37" Outlet O.D.: 2 1/4" Outlet Length: 10 1/2" Shell Length: 14 1/2" Inlet I.D.: 2 1/4" Inlet Length: 11 1/4" Shell Diameter: 4 1/4"

PART NO.	DESCRIPTION	SPECS.
MUFMF4 Replaces 190435M92 Inlet Clamp: MC214 Rain Cap: RC3	MF-90 (Gas & LP engines) (Vertical round body)	Weight: 6 lbs. Horizontal Length: 37" Outlet O.D.: 2 1/4" Outlet Length: 10 1/2" Shell Length: 14 1/2" Inlet I.D.: 2 1/4" Inlet Length: 11 1/2" Shell Diameter: 4 1/4"
MUFMF5 Replaces 1022401M1 Inlet Clamp: MC400 Rain Cap: RC9	MF-97 (Diesel) (1962-64) (Vertical round body)	Weight: 8 lbs. Horizontal Length: 24" Outlet O.D.: 4" Outlet Length: 3 1/4" Shell Length: 19" Inlet I.D.: 3 15/16" Inlet Length: 1 1/2" Shell Diameter: 6"
MUFMF6 Replaces 508825M94 539523M92 898535M91 Inlet Clamp: MC200 Outlet Clamp: CL200	MF-20, MF-30, MF-31, MF-32, MF40B, & MF-50 (Gas & Diesel) MF-230, MF-240, MF-250 & MR-290 (Gas & Diesel Perkins engines) Note: MF290 to replace 898535M91, also use 898534M1 OEM tailpipe. (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 32" Outlet O.D.: 2" Outlet Length: 12 1/2" Shell Length: 16 1/2" Inlet I.D.: 2" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"
MUFMF7 Replaces 505545M91 (Muffler) 181600M91 (Pipe)	MF-35, MH35 & TO35 ag. MF-202, 203, 204 & 205 (Gas and Diesel) Utility Tractors Note: Complete assembly includes muffler, inlet pipe and clamp. MF17 muffler is used in this assembly. MFE2 pipe is used in this assembly. Pipe has 3 bolt flange inlet.	Weight: 9 lbs. Horizontal Length: n/a Outlet O.D.: 1 1/2" Outlet Length: n/a Shell Length: n/a Inlet I.D.: n/a Inlet Length: n/a Shell Diameter: 3 1/4"
MUFMF9 Replaces 184207M91 Rain Cap: RC0	TO-35 (Gas & Diesel) (1955-1957) For replacement muffler use FO11	Weight: 9 lbs. Pipe Length: 17 1/2" Outlet O.D.: 1 1/2" Outlet Length: n/a Shell Length: 10 1/2" Inlet I.D.: 1 1/4" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"
MUFMF10 Replaces 181867M91 Inlet Clamp: MC178 Rain Cap: RC2	MF-35 (1960-1964) - Gas & Diesel MF135 (1964-1974) - Gas & Diesel MF202, 203, 204, 205 - Gas & Diesel Utility Tractors Note: MF10 is used as both vertical & horizontal for these tractor applications. (Round body)	Weight: 6 lbs. Horizontal Length: 34" Outlet O.D.: 2" Outlet Length: 14 1/2" Shell Length: 17" Inlet I.D.: 1 1/8" Inlet Length: 3" Shell Diameter: 4 1/4"
MUFMF11 Replaces 182609M91 Inlet Clamp: MC200 Outlet Clamp: MC112	Ferguson F-40 & MF-50 (1957-64) (Gas & LP engines) Note: Use for both horizontal & vertical applications. (Round body)	Weight: 4 lbs. Horizontal Length: 18 1/2" Outlet O.D.: 1 3/8" Outlet Length: 2" Shell Length: 15 1/2" Inlet I.D.: 1 15/16" Inlet Length: 2 1/2" Shell Diameter: 3 1/4"

Massey Tractors

PART NO.	DESCRIPTION	SPECS.	PART NO.	DESCRIPTION	SPECS.
MUFMF12 Replaces 184207M91 Inlet Clamp: MC200 Outlet Clamp: MC112	MF-50 & MR-65 (Gas engine) MF-302 & MF-304 (Gas engine) MF-302 & 304 (Gas engine) (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 18" Outlet O.D.: 1 3/4" Outlet Length: 2 1/2" Shell Length: 13 1/2" Inlet I.D.: 1 15/16" Inlet Length: 2" Shell Diameter: 3 1/4"	MUFMF23 Replaces 194431M91 Inlet Clamp: MC214	MF-165, MF-175 & MF-180 (Gas & Diesel) (Perkins 4-236 & 4-248 c.i.d.) Note: This muffler is for tractors with loader. (See MF30 also) (Vertical round body)	Weight: 7 lbs. Horizontal Length: 40" Outlet O.D.: Bent pipe Outlet Length: 13" Shell Length: 16 1/2" Inlet I.D.: 2 1/8" Inlet Length: 10" Shell Diameter: 4 1/4"
MUFMF13 Replaces 187184M1 Inlet Clamp: MC134 Outlet Clamp: MC134	MF-50 & MF-65 (Gas & Diesel) (57-64) Note: Vertical & horizontal MF50 Vertical for MF65 (Round body)	Weight: 6 lbs. Horizontal Length: 34" Outlet O.D.: 1 3/4" Outlet Length: 11" Shell Length: 20" Inlet I.D.: 1 3/4" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"	MUFMF24 Replaces 509939M91 513563M92 523394M95 MC234 Rain Cap: RC7	MF-70 (gas & Diesel) MF-1080 (4 cyl. Gas engine) MF-1100 (6 cyl. Gas engine) Note: Also available for this application is an oval body muffler - see MF29 or MF23. For tractor with a loader and space is limited. (Vertical round body)	Weight: 8 lbs. Horizontal Length: 32" Outlet O.D.: 2 3/4" Outlet Length: 5 1/2" Shell Length: 17" Inlet I.D.: 2 3/4" Inlet Length: 9 1/2" Shell Diameter: 5 1/2"
MUFMF14 Replaces 32999A Inlet Clamp: MC212 Rain Cap: RC3	55, 55D, 55K & 555 Massey Harris - (1942-1957) (Vertical round body)	Weight: 5 lbs. Horizontal Length: 21" Outlet O.D.: 2 1/2" Outlet Length: 5" Shell Length: 14" Inlet I.D.: 2 3/8" Inlet Length: 2" Shell Diameter: 6"	MUFMF25 Replaces 510634M91 MC312 Rain Cap: RC8	MF-1100 (354 Diesel) MF-1130 (T-354 Diesel) Note: Also available for this application is an oval body muffler - see MF28. (Vertical round body)	Weight: 10 lbs. Horizontal Length: 32" Outlet O.D.: 3 1/2" Outlet Length: 2 3/4" Shell Length: 20 1/2" Inlet I.D.: 3 7/16" Inlet Length: 9" Shell Diameter: 6"
MUFMF15 Replaces 32289A 767994M91 Inlet Clamp: MC212 Rain Cap: RC3	Massey Harris - (1942-1957) - Gas & Diesel 20, 20K, 22, 22K (exc. 1948), 30, 30K, 33, 333, 44, 44SPL, 44D, 44K, 44-6, 444, 81, 82, 101Jr. 101Sr. & 102Sr. (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 21" Outlet O.D.: 2 1/2" Outlet Length: 5" Shell Length: 14" Inlet I.D.: 2 3/8" Inlet Length: 2" Shell Diameter: 4 1/4"	MUFMF27 Custom Design Rain Cap: RC2	MF-65 (w/Perkins diesel) Note: Outlet I.D. fits 2" O.D. pipe.	Weight: 7 lbs. Pipe Length: 17 1/2" Outlet O.D.: 2" Outlet Length: 1/2" Shell Length: 12" Inlet I.D.: n/a Inlet Length: n/a Shell Diameter: 4 1/4"
MUFMF17 Replaces 180364M91 505545M92 Inlet Clamp: MC112 Outlet Clamp: MC112	TE-20, TO-20 & TO-30 (1948-1954) TO-35 & MF-35 (1955-63) Gas & Diesel MF-135 (1964-1974) Gas & Diesel (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 34" Outlet O.D.: 1 1/2" Outlet Length: 8 1/4" Shell Length: 23" Inlet I.D.: 1 1/2" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"	MUFMF28 Replaces 522421M92 530689M91 MC312 Rain Cap: RC8	MF-1100 (354 Dsl); MF-1130 (T-354 Dsl) Note: Also available for this application is a round body muffler - see MF25	Weight: 16 lbs. Pipe Length: 34 1/2" Outlet O.D.: 3 1/2" Outlet Length: 4" Shell Length: 23 1/2" Inlet I.D.: 3 1/2" Inlet Length: 7 1/2" Shell Diameter: 6" x 9 1/2"
MUFMF18 Replaces 184207M91 Rain Cap: RC0	TO-20 & TO-30 Gas (48-57) Note: Special clamp MC300 required. For replacement muffler use FO11. Pipe has flared inlet. Pipe is custom design. 2 piece assy.	Weight: 8 lbs. Pipe Length: 17 1/2" Outlet O.D.: 1 1/2" Outlet Length: n/a Shell Length: 10 1/2" Inlet I.D.: 1 3/8" Inlet Length: n/a Shell Diameter: 3 1/4"	MUFMF29 Replaces 522422M92 530690M91 MC234 Rain Cap: RC7	MF-70 & 80 Gas & Diesel MF-1080 (4 cyl. Gas & Diesel engine) MF-1100 (6 cyl. Gas engine) Note: Also available for this application is a round body muffler MF24.	Weight: 11 lbs. Pipe Length: 32" Outlet O.D.: 2 3/4" Outlet Length: 6 1/2" Shell Length: 16" Inlet I.D.: 2 3/4" Inlet Length: 10" Shell Diameter: 5" x 11"
MUFMF21 Replaces 180364M91 505545M92 Inlet Clamp: MC112 Outlet Clamp: MC112	MH-35, MF-35 & TO-35 (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 34" Outlet O.D.: 1 1/2" Outlet Length: 11" Shell Length: 23" Inlet I.D.: 1 1/2" Inlet Length: 2 3/4" Shell Diameter: 3 1/4"	MUFMF31 Replaces 522589M91 539523M92 539525M91 890476M92 MC134	MF-135 (U.K.) & MF-150 (Gas & Diesel) (using Perkins engines) MF-230, 240, 250 (Gas & Diesel) MF-245, 255, 265, 275 (Diesel) Note: See MFE9 (Horizontal round body)	Weight: 5 lbs. Pipe Length: 39" Outlet O.D.: 1 3/4" Outlet Length: 12" Shell Length: 15" Inlet I.D.: 1 3/4" Inlet Length: 12" Shell Diameter: 4 1/4"
MUFMF22 Replaces 505404M91 539525M91 Inlet Clamp: MC134	MF-150 (Gas & Diesel)- early s/n machines. (Vertical round body)	Weight: 7 lbs. Horizontal Length: 37" Outlet O.D.: 1 1/4" Outlet Length: 10" Shell Length: 17" Inlet I.D.: 1 3/4" Inlet Length: 10" Shell Diameter: 3 1/4"	MUFMF32 Replaces 505545M91	MF-35 (Diesel) Pipe has 3 bolt flange inlet. Note: MFE12 pipe is used in this assembly. MF17 muffler is used in this assembly, See MF17	Weight: 9 lbs. Pipe Length: n/a Outlet O.D.: 1 1/2" Outlet Length: n/a Shell Length: n/a Inlet I.D.: n/a Inlet Length: n/a Shell Diameter: 3 1/4"

Massey Tractors

PART NO.	DESCRIPTION	SPECS.
MUFMF33 Replaces 525196M1 525193M1 Inlet Clamp: MC212 Rain Cap: RC4	MF-1500 & MF-1800 (late s/n - Cat. Diesel) MF-1505 & MF-1805 (Cat. Diesel) Note: Muffler has dual inlet. See MF25. (Vertical round body)	Weight: 25 lbs. Horizontal Length: 41" Outlet O.D.: 3" Outlet Length: 3" Shell Length: 36" Inlet I.D.: 2 1/2" Inlet Length: 2 3/4" Shell Diameter: 9"
MUFMF38 Replaces 578090M92 535389M91 998669M91 Inlet Clamp: MC214	MF-230, MF-235, MF-245, MF-255, MF-265, MF-275 (Gas & Diesel engine) Note: MF38 has straight outlet pipe. To use as replacement for 535389M91 & 998669M91 also order EE3 extender pipe. (Vertical oval body)	Weight: 11 lbs. Horizontal Length: 34" Outlet O.D.: 2" Outlet Length: 8 1/2" Shell Length: 23" Inlet I.D.: 2 1/8" Inlet Length: 2 3/4" Shell Diameter: 4" x 8"
MUFMF39 Replaces 528068M92 Inlet Clamp: MC312 Rain Cap: RC8	MF-1105 & MF-1135 (Diesel). (Vertical oval body)	Weight: 15 lbs. Horizontal Length: 28" Outlet O.D.: 3 1/2" Outlet Length: 3 1/2" Shell Length: 22" Inlet I.D.: 3 7/16" Inlet Length: 3" Shell Diameter: 6" x 10"

Minneapolis-Moline Tractors

PART NO.	DESCRIPTION	SPECS.
MUFMM3 Replaces 10A7889 Inlet Clamp: MC214 Rain Cap: RC5	445 (All) Universal & Utility (Vertical round body)	Weight: 6 lbs. Horizontal Length: 17" Outlet O.D.: 2 1/4" Outlet Length: 2 1/4" Shell Length: 12" Inlet I.D.: 2 1/4" Inlet Length: 2 1/2" Shell Diameter: 4 1/4"
MUFMM4 Replaces KE846 10A12633 Inlet Clamp: MC234 Rain Cap: RC7	Z (early), U (all), G, G-6/G-VI 5 Star & Jet Star (late) (Vertical round body)	Weight: 7 lbs. Horizontal Length: 26" Outlet O.D.: 2 3/4" Outlet Length: 6" Shell Length: 15" Inlet I.D.: 2 3/4" Inlet Length: 4 1/2" Shell Diameter: 4 1/4"
MUFMM7 Replaces 10A15416 10A16033 10A23891 Inlet Clamp: MC258 Rain Cap: RC7	M-5, M602, M604 & M670 (Vertical round body)	Weight: 7 lbs. Horizontal Length: 32" Outlet O.D.: 2 3/4" Outlet Length: 3 1/2" Shell Length: 17" Inlet I.D.: 2 5/8" Inlet Length: 11 1/2" Shell Diameter: 5 1/2"
MUFMM8 Replaces 10A17881 Inlet Clamp: MC400 Rain Cap: RC9	G705, G706 & G1000 Note: Uses MM8A extension pipe (Vertical round body)	Weight: 11 lbs. Horizontal Length: 24" Outlet O.D.: 4" Outlet Length: 3 1/2" Shell Length: 19" Inlet I.D.: 3 15/16" Inlet Length: 1 1/2" Shell Diameter: 6"

Oliver Tractors

PART NO.	DESCRIPTION	SPECS.
MUF OL3 Replaces KA-452B Inlet Clamp: MC212 Rain Cap: RC3	Super 66, 77 & 88 (Gas & diesel) Note: Can replace OL2 and OL4 mufflers; must enlarge hole in hood. (Vertical round body)	Weight: 4 lbs. Horizontal Length: 29" Outlet O.D.: 2 1/2" Outlet Length: 5" Shell Length: 20" Inlet I.D.: 2 3/8" Inlet Length: 4" Shell Diameter: 3 1/4"
MUF OL5 Replaces 161386A Inlet Clamp: MC200 Outlet Clamp: MC200	Super 55 & 550 (Gas & Diesel) Note: Extension pipe OL5A also available. (Horizontal round body)	Weight: 4 lbs. Horizontal Length: 15 1/2" Outlet O.D.: 1 7/8" Outlet Length: 2" Shell Length: 12 1/2" Inlet I.D.: 1 15/16" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"
MUF OL8 Replaces 155981A Inlet Clamp: MC312 Rain Cap: RC4	1900 & 1950 (GM Diesel) s/n 124396 & up (Vertical round body)	Weight: 10 lbs. Horizontal Length: 27" Outlet O.D.: 3" Outlet Length: 3 1/4" Shell Length: 19" Inlet I.D.: 3 1/2" Inlet Length: 4 1/2" Shell Diameter: 6"
MUF OL101 Replaces 404791D Inlet Clamp: MC200	Combine - Model 25 (Gas - Chrysler 6 cyl) (Horizontal round body)	Weight: 5 lbs. Horizontal Length: 18" Outlet O.D.: 1 15/16" Outlet Length: 2 1/4" Shell Length: 16" Inlet I.D.: 1 15/16" Inlet Length: 2" Shell Diameter: 4 1/4"
MUF OL102 Replaces 1130270 Inlet Clamp: MC212	Combine -431, 435, 525, 535 & 545 (Vertical round body)	Weight: 6 lbs. Horizontal Length: 18" Outlet O.D.: 2 1/2" Outlet Length: 2" Shell Length: 14" Inlet I.D.: 2" Inlet Length: 4" Shell Diameter: 6"

Versatile Tractors

PART NO.	DESCRIPTION	SPECS.
MUF FO39 Replaces 09700143 Inlet Clamp: MC212	256 V (1984-1985) Versatile with Cummins/Ford engine 276 II, 276V (Vertical oval body)	Weight: 12 lbs. Horizontal Length: 33 1/2" Outlet O.D.: 2 3/4" Outlet Length:Bent pipe Shell Length: 18" Inlet I.D.: 3" Inlet Length: 2 1/4" Shell Diameter: 4" x 9"
MUF FO40 Replaces 09702857 Inlet Clamp: MC234	9030 E, 9030V (1990-1997) Bi-Directional tractor (Vertical oval body)	Weight: 13 lbs. Horizontal Length: 43" Outlet O.D.: 2 3/4" Outlet Length:Bent pipe Shell Length: 18" Inlet I.D.: 3" Inlet Length: 2 1/4" Shell Diameter: 4" x 9"

Versatile Tractors

PART NO.	DESCRIPTION	SPECS.
MUFVT1 Replaces 606T123-A Inlet Clamp: MC212 Rain Cap: RC9	118, 145 4WD articulated tractor. (Diesel) - both 6 cyl. & 8 cyl. engines Note: Muffler has double inlet tubes. (Vertical round body)	Weight: 26 lbs. Horizontal Length: 43" Outlet O.D.: 3 7/8" Outlet Length: 5" Shell Length: 36" Inlet I.D.: 2 1/2" Inlet Length: 3 1/2" Shell Diameter: 9"
MUFVT3 Replaces 260424 Inlet Clamp: MC200 Rain Cap: RC2	400 Swather (to 1981) - Gas (Vertical round body)	Weight: 4 lbs. Horizontal Length: 17" Outlet O.D.: 2" Outlet Length: 2" Shell Length: 12 1/2" Inlet I.D.: 2" Inlet Length: 2 1/4" Shell Diameter: 4 1/4"
MUFVT4 Replaces 36460 Inlet Clamp: MC200	400 Swather (1981 & up) - (Gas) and 4400 (Gas) Note: Muffler has side inlet (Horizontal round body)	Weight: 10 lbs. Horizontal Length: 26" Outlet O.D.: 2" Outlet Length: 2 3/4" Shell Length: 23 1/2" Inlet I.D.: 2" Inlet Length: 2" Shell Diameter: 5 1/2"
MUFVT6 Replaces V108431 Inlet Clamp: MC500 Rain Cap: RC11	750, 800 - 1975 825, 835, 850 - 1976 -77 855, 875, 895 Note: Muffler has side inlet tube. Also has a straight 1 1/4" dia. Aspirator tube.(Vertical oval body)	Weight: 40 lbs. Horizontal Length: 46" Outlet O.D.: 5" Outlet Length: 5 1/4" Shell Length: 40 1/2" Inlet I.D.: 5" Inlet Length: 2" Shell Diameter: 8" x 11 1/2"
MUFVT7 Inlet Clamp: CL-400	836, 846, 856, 876 Application note: Muffler has two hold mounting brackets, Muffler also has a 1-3/4" aspirator tube "G"	Weight: 45 lbs. Horizontal Length: 36-1/2" Outlet O.D.: 5" Outlet Length: 5" Shell Length: 31" Inlet I.D.: 4" Inlet Length: 3" Shell Diameter: N/a
MUFVT8	936, 946, 956, 976 Application note: Muffler has two hold mounting brackets, Muffler also has a 1-3/4" aspirator tube "G"	Weight: 55 lbs. Horizontal Length: 45-1/2" Outlet O.D.: 5" Outlet Length: 5" Shell Length: 40" Inlet I.D.: 5" Inlet Length: 3" Shell Diameter: N/a

White Tractors

PART NO.	DESCRIPTION	SPECS.
MUFWT1 Replaces 30-3322734 Inlet Clamp: MC312 Rain cap: RC8	2-105 & 2-135 (Diesel) Note: Muffler has no aspirator tube. (Vertical oval body)	Weight: 17 lbs. Horizontal Length: 37 1/2" Outlet O.D.: 3 1/2" Outlet Length: 5" Shell Length: 27" Inlet I.D.: 3 7/16" Inlet Length: 6 1/2" Shell Diameter: 4 3/4" x 8"

PART NO.	DESCRIPTION	SPECS.
MUFWT2 Replaces 30-3332284 30-3387712 Inlet Clamp: MC312 Rain cap: RC8	2-105 (Diesel) Note: Muffler has a straight 1 1/2" O.D. aspirator tube. (Vertical oval body)	Weight: 18 lbs. Horizontal Length: 37 1/2" Outlet O.D.: 3 1/2" Outlet Length: 5" Shell Length: 27" Inlet I.D.: 3 1/16" Inlet Length: 6 1/2" Shell Diameter: 4 3/4" x 8"
MUFWT3 Replaces 30-3364178 30-3322742 Inlet Clamp: MC312 Rain cap: RC9	2-135 (Diesel) Note: Muffler has a straight 1 1/2" O.D. aspirator tube. (Vertical oval body)	Weight: 18 lbs. Horizontal Length: 37 1/2" Outlet O.D.: 4" Outlet Length: 5" Shell Length: 27" Inlet I.D.: 3 1/16" Inlet Length: 6 1/2" Shell Diameter: 4 3/4" x 8"

Wisconsin Motors

PART NO.	DESCRIPTION	SPECS.
MUFWIS2 Replaces WD-26 Inlet Clamp: MC158 Rain Cap: RC1	Engine models: A, AA, AB, ABM, VE, VEE Note: Single & two cylinder air cooled engines. (Vertical round body)	Weight: 4 lbs. Horizontal Length: 17" Outlet O.D.: 1 3/4" Outlet Length: 2" Shell Length: 12 1/2" Inlet I.D.: 1 1/8" Inlet Length: 2 1/4" Shell Diameter: 3 1/4"
MUFWIS3 Replaces WD-76 Inlet Clamp: MC212	Engine models: V460D, V461D, V465D (Horizontal round body)	Weight: 6 lbs. Horizontal Length: 20" Outlet O.D.: 2" Outlet Length: 4" Shell Length: 16" Inlet I.D.: 2 3/8" Inlet Length: 2 1/4" Shell Diameter: 4 1/4"
MUFWIS4 Replaces WD-98 Custom Design	T, THD, THDM, TJD (2 CYL), V, VEE, A, VE4, VF4, VH4, VH4D (4 CYL). (Horizontal round body)	Weight: 5 lbs. Horizontal Length: 20" Outlet O.D.: 1 3/4" Outlet Length: 4" Shell Length: 15 1/2" Inlet I.D.: 1 11/16" Inlet Length: 2" Shell Diameter: 4 1/4"
MUFWIS5 Replaces WD-98 Custom Design	T, THD, THDM, TJD (2 CYL), V, VEE, A, VE4, VF4, VH4, VH4D (4 CYL). Note: NPTF pipe thread inlet. Fits 1 1/4" pipe.	Weight: 2 lbs. Horizontal Length: 6" Outlet O.D.: Vent Outlet Length: n/a Shell Length: 2" Inlet I.D.: 1 1/4" Inlet Length: n/a Shell Diameter: 6"
MUFWIS7 Replaces WD-47 Custom Design Inlet Clamp: MC200	VE4D, VF4D, VG4D, VH4DM & VP4D (4 cyl) (Horizontal round body)	Weight: 5 lbs. Horizontal Length: 18" Outlet O.D.: 2 1/4" Outlet Length: 2 1/4" Shell Length: 16" Inlet I.D.: 1 15/16" Inlet Length: 2" Shell Diameter: 4 1/4"

Yanmar

PART NO.	DESCRIPTION	SPECS.
MUFYM1 Replaces 721250-13700	<p>YM1100/1100D, YM1300/1300D, YM1301/1301D, YM135/135D, YM140/140D, YM1401/1401D, YM147/147D, YM1500/1500D, YM1502/1502D, YM1510/1510D, YM155/155D, YM1600, 1600D, YM1601/1601D, YM1602/1602D, YM1610/1610D, YM165/165D, YM169/169D, YM1700/1700D, YM1702/1702D, YM1720, 1720D, YM1802/1802D, YM1810/1810D, YM1820/1820D, YM186/186D, YM187/187D, YM1900/1900D, YM195/195D, YM2000/2000D, YM2001/2001D, YM2002/2002D, YM210/210D, YM220/220D, YM2200/2200D, YM2202/2202D, YM2210/2210D, YM2220/2220D, YM226/226D, YM2301/2301D, YM2310/2310D, YM240/240D, YM2402/2402D, YM2420/2420D, YM250/250D, YM2500/2500D, YM2610/2610D, YM2620/2620D, YM2700/2700D, YM276/276D, YM2820/2820D, YM3000/3000D, YM3110/3110D, YM3220/3220D, YM330/330D, YM336/336D, YM3810/3810D Vertical round body Replace your entire muffler assy with this unit. It fits all Yanmar & Iseki tractors except tractors with mufflers that come out through a hole in the top of the hood as on some F & FX series and the YM2700 and YM147 and the 2200.</p>	 <p>Weight: 6 lbs. Horizontal Length: 33 ½" Outlet O.D.: 1 ¾" Outlet Length: 14 ½" Shell Length: 12" Inlet I.D.: n/a Inlet Length: 6 ½" Shell Diameter: 4 ¼"</p> 

International Trucks ½ - 2 Ton



MUF 1024

PART NO.	Year Model	Model # of size rating	Engine data c.i.d. (cu. in) Type (Gas/ Dsl 6 cyl or V-8)	SPECS.
MUF1024 Inlet Clamp: MC212 Outlet Clamp: MC214	63-70 63-70 68-69	1600 & 1700 series 6 cyl. (Gas) 1600, 1700, 1800 Series & 1890 Loadstar D301 (Diesel) & D354 (Diesel) 1600 Series 266-V8 (Gas)		<p>Weight: 13 lbs. Horizontal Length: 27 ¾" Outlet O.D.: 2 ½" Outlet Length: 2 ½" Shell Length: 24 ½" Inlet I.D.: 2 ½" Inlet Length: 2 ½" Shell Diameter: 6 ½"</p>

HEAVY DUTY TRUCK MUFFLERS

Chevrolet Trucks ½ - 2 Ton



PART NO.	Year Model	Model # of size rating	Engine data c.i.d. (cu. in) Type (Gas/ Dsl 6 cyl or V-8)	SPECS.
MUF1016	72-74 72-74	50, 60 & 65 50, 60 & 65	366-V8 (Gas) 427-V8 (Gas)	<p>Weight: 12 lbs. Horizontal Length: 35" Outlet O.D.: 2 ½" Outlet Length: 3 ½" Shell Length: 29" Inlet I.D.: 2 ½" Inlet Length: 3" Shell Diameter: 6"</p>

Ford Trucks ½ - 2 Ton



MUF1015



MUF1016

PART NO.	Year Model	Model # of size rating	Engine data c.i.d. (cu. in) Type (Gas/Dsl 6 cyl or V-8)	SPECS.
MUF1015	61-74	B500 & B600 E100-E300 (Econoline-170-6cyl) F100-F600 N500 & N600 Bronco (W/289-V8)	240/300 - 6 cyl. 289 or 302 V8 Use alternate muffler 1016 - below	<p>Weight: 10 lbs. Horizontal Length: 33 ½" Outlet O.D.: 2" Outlet Length: 2 ½" Shell Length: 27" Inlet I.D.: 2" Inlet Length: 2 ½" Shell Diameter: 6"</p>
MUF1016	56-74	B500 thru B750 C500 thru C800 F500 thru F900 N500 thru N750 L, LN, LNT, LT, LTS 600-800	240/300 6 cyl. 302, 30, 361 & 390 V-8.	<p>Weight: 12 lbs. Horizontal Length: 35" Outlet O.D.: 2 ½" Outlet Length: 3 ½" Shell Length: 29" Inlet I.D.: 2 ½" Inlet Length: 2 ¾" Shell Diameter: 6"</p>

GMC Trucks ½ - 2 Ton



MUF1016

PART NO.	Year Model	Model # of size rating	Engine data c.i.d. (cu. in) Type (Gas/Dsl 6 cyl or V-8)	SPECS.
MUF1016	1972 72-74 73-74	CM5500 & 6500 CM5500 & 6500 CM5500 & 6500	250 & 292 -6cyl 366-V8 (gas) 427-V8 (Gas)	<p>Weight: 12 lbs. Horizontal Length: 35" Outlet O.D.: 2 ½" Outlet Length: 3 ½" Shell Length: 29" Inlet I.D.: 2 ½" Inlet Length: 3 ¾" Shell Diameter: 6"</p>